

AD-A172 401

ELECTROCHEMISTRY OF SULFUR NA2S S2 S2CL2 AND CS2 IN  
1-METHYL-3-ETHYLMIDA. (U) FRANK J SEILER RESEARCH LAB  
UNITED STATES AIR FORCE ACADEMY C. B J PIERSON ET AL.


1/1


UNCLASSIFIED

AUG 86 FJSRL-TR-86-0009

F/G 7/4

NL

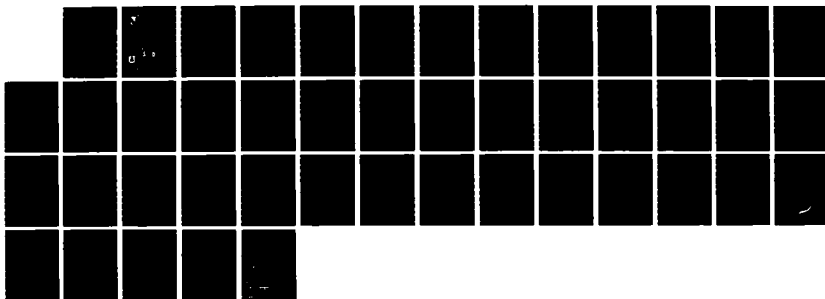



AD-A172 401



FJSRL-TR-86-0009

FRANK J. SEILER RESEARCH LABORATORY

**ELECTROCHEMISTRY OF SULFUR,  
Na<sub>2</sub>S, S<sub>2</sub>, S<sub>2</sub>CL<sub>2</sub> AND CS<sub>2</sub> IN  
1-METHYL-3-ETHYLIMIDAZOLIUM  
CHLORIDE-ALUMINUM CHLORIDE MELTS**

DTIC FILE COPY

**B. J. Piersma**

**J. S. Wilkes**

**DTIC**  
**ELECTE**  
**OCT 02 1986**  
**S** **D**  
**D**

APPROVED FOR PUBLIC RELEASE;  
DISTRIBUTION UNLIMITED.

**August 1986**

**AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE**

86 10 01 196




This document was prepared by the Electrochemistry Division, Directorate of Chemical Sciences, Frank J. Seiler Research Laboratory, United States Air Force Academy, CO. The research was conducted under Project Work Unit number 2303-F2-10. Dr. John S. Wilkes was the project scientist.


When U.S. Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the government may have formulated, furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

Inquiries concerning the technical content of this document should be addressed to the Frank J. Seiler Research Laboratory (AFSC), FJSRL/NC, USAF Academy, Colorado Springs, CO 80840. Phone AC 303-472-2655.

This report has been reviewed by the Commander and is releasable to the National Technical Information Service (NTIS). At NTIS it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

  
JOHN S. WILKES  
Project Scientist

  
CHESTER J. DYMEK, JR., Lt Col, USAF  
Director, Chemical Sciences

  
KENNETH E. SIEGENTHALER, Lt Col, USAF  
Chief Scientist

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

Printed in the United States of America. Qualified requestors may obtain additional copies from the Defense Documentation Center. All others should apply to:

National Technical Information Service  
6285 Port Royal Road  
Springfield VA 22161

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE

## REPORT DOCUMENTATION PAGE ADA

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS <b>AD-A172 401</b>									
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.									
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE												
4. PERFORMING ORGANIZATION REPORT NUMBER(S) FJSRL-TR-86-0009			5. MONITORING ORGANIZATION REPORT NUMBER(S)									
6a. NAME OF PERFORMING ORGANIZATION Frank J. Seiler Research Lab		6b. OFFICE SYMBOL (If applicable) FJSRL/NC		7a. NAME OF MONITORING ORGANIZATION								
6c. ADDRESS (City, State and ZIP Code) USAF Academy Colorado Springs, CO 80840-6528			7b. ADDRESS (City, State and ZIP Code)									
8a. NAME OF FUNDING/SPONSORING ORGANIZATION FJSRL		8b. OFFICE SYMBOL (If applicable) FJSRL/NC		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER								
8c. ADDRESS (City, State and ZIP Code) USAF Academy Colorado Springs, CO 80840-6528			10. SOURCE OF FUNDING NOS. <table border="1"><thead><tr><th>PROGRAM ELEMENT NO.</th><th>PROJECT NO.</th><th>TASK NO.</th><th>WORK UNIT NO.</th></tr></thead><tbody><tr><td>6.1</td><td>2303</td><td>E2</td><td>10</td></tr></tbody></table>		PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.	6.1	2303	E2	10
PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT NO.									
6.1	2303	E2	10									
11. TITLE (Include Security Classification) Electrochemistry of Sulfur, Na <sub>2</sub> S, S <sub>2</sub> , S <sub>2</sub> CL <sub>2</sub> , & CS <sub>2</sub> in 1-Methyl-3-												
12. PERSONAL AUTHOR(S) Ethylimidazolium Chloride-Aluminum Chloride Melts B. J. Piersma and J. S. Wilkes												
13a. TYPE OF REPORT Interim		13b. TIME COVERED FROM 6/86 TO 8/86		14. DATE OF REPORT (Yr, Mo, Day) 86/08/13								
15. SUPPLEMENTARY NOTATION												
17. COSATI CODES <table border="1"><thead><tr><th>FIELD</th><th>GROUP</th><th>SUB. GR.</th></tr></thead><tbody><tr><td>07</td><td>04</td><td></td></tr></tbody></table>			FIELD	GROUP	SUB. GR.	07	04		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Room temperature molten salts sulfur electrochemistry			
FIELD	GROUP	SUB. GR.										
07	04											
19. ABSTRACT (Continue on reverse if necessary and identify by block number) The electrochemical behavior of sulfur, sodium sulfide, sulfur monochloride and carbon disulfide was studied on a glassy carbon electrode at 25°C in 1-methyl-3-ethylimidazolium chloroaluminate melts in basic (excess organic chloride), neutral (1:1 mole ratio of organic chloride and AlCl <sub>3</sub> ) regions. Cyclic voltammetry, rotating disk electrode, and steady-state potentiostatic techniques were used in the study. The literature on sulfur and sulfur compounds in NaCl-AlCl <sub>3</sub> melts is reviewed and comparisons are made with the room temperature melts.												
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>			21. ABSTRACT SECURITY CLASSIFICATION Unclassified									
22a. NAME OF RESPONSIBLE INDIVIDUAL John S. Wilkes			22b. TELEPHONE NUMBER (Include Area Code) (303) 472-2655									

## INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

### GENERAL INFORMATION

The accuracy and completeness of all information provided in the DD Form 1473, especially classification and distribution limitation markings, are the responsibility of the authoring or monitoring DoD activity.

Because the data input on this form will be what others will retrieve from DTIC's bibliographic data base or may determine how the document can be accessed by future users, care should be taken to have the form completed by knowledgeable personnel. For better communication and to facilitate more complete and accurate input from the origination of the form to those processing the data, space has been provided for the name, telephone number and office symbol of the DoD person responsible for the input cited on the form. These are to be noted in Block 22.

All information on the DD Form 1473 should be typed.

Only information appearing on or in the report, or applying specifically to the report in hand should be reported. If there is any doubt, the block should be left blank.

Some of the information on the forms (e.g., title, abstract) will be machine-indexed. The terminology used should describe the content of the report or identify it as precisely as possible for future identification and retrieval.

**SPECIAL NOTE: UNCLASSIFIED ABSTRACTS AND TITLES DESCRIBING CLASSIFIED DOCUMENTS MAY APPEAR SEPARATELY FROM THE DOCUMENTS IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT BULLETINS AND BIBLIOGRAPHIES OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE RDT/E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS AND TITLES.**

The Defense Technical Information Center (DTIC) is ready to offer assistance to anyone who needs and requests it. Call Data Base Input Division (AUTOVON) 284-7044; Com 202-274-7044.

### SPECIFIC BLOCKS

#### SECURITY CLASSIFICATION OF THE FORM:

In accordance with DoD 5200.1 R, Information Security Program Regulation, Chapter VI Section 2, paragraph 4-200, classification markings are to be stamped, printed, or written at the tops and bottom of the form in capital letters that are larger than those used in the text of the document. See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Section II, paragraph 11a(2). This form should be nonclassified, if possible.

**Block 1.a. Report Security Classification:** Designate the highest security classification of the report. (See DoD 5200.00.1-R, Chapters I, IV, VII, XI, Appendix A).

**Block 1.b.** Enter the restricted marking or warning notice of the report (e.g., CNWDI, RD, NATO).

**Block 2.a. Security Classification Authority:** Enter the commonly used markings in accordance with DoD 5200.1-R, Chapter IV, Section 4, paragraph 4-400 and 4-402. Indicate classification authority.

**Block 2.b. Declassification/Downgrading Schedule:** Indicate specific date or event for declassification or the notation "Originating Agency Determination Required" or "OADR." Also insert (when applicable) downgrade to: \_\_\_\_\_ on \_\_\_\_\_, (e.g., "Downgrade to Confidential on 6 July 1983"). (See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Appendix II).

**NOTE:** Entry must be made in Blocks 2.a. and 2.b. except when the original report is unclassified and has never been upgraded.

**Block 3. Distribution/Availability Statement of Report:** Insert the statement as it appears on the report. If a limited distribution statement is used, the reason must be one of those given by DoD Directive 5200.20, Distribution Statements on Technical Documents. The Distribution Statement should provide for the broadest distribution possible within limits of security and controlling office limitations.

**Block 4. Performing Organization Report Number(s):** Enter the unique alphanumeric report number(s) assigned by the organization originating or generating the report from its research and whose name appears in Block 6. These numbers should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Performing Organization is also the Monitoring Agency, enter the report number in Block 4.

**Block 5. Monitoring Organization Report Number(s):** Enter the unique alphanumeric report number(s) assigned by the Monitoring Agency. This should be a number assigned by a Department of Defense or other government agency and should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Monitoring Agency is the same as the Performing Organization enter the report number in Block 4 and leave Block 5 blank.

**Block 6.a. Performing Organization:** For in-house reports, enter the name of the performing activity. For reports prepared under contract or grant, enter the contractor or the grantee who generated the report and identify the appropriate corporate division, school, laboratory, etc., of the author.

**Block 6.b.** Enter the office symbol of the performing organization.

**Block 6.c.** Enter the address of the performing organization, list city, state and ZIP code.

**Block 7.a. Monitoring Organization - Name:** This is the agency responsible for administering or monitoring a project, contract, or grant. If the monitor is also the performing organization, leave Block 7.a. blank. In the case of joint sponsorship, the monitoring organization is determined by advanced agreement. It can be either an office, a group, or a committee representing more than one activity, service or agency.

**Block 7.b.** Enter the address of the monitoring organization. Include city, state and ZIP code.

**Block 8.a.** Funding (Sponsoring) Organization — Name: Enter the full official name of the organization under whose immediate funding the document was generated, whether the work was one in-house or by contract. If the Monitoring Organization is the same as the Funding Organization, leave Block 8.a. blank.

**Block 8.b.** Enter the office symbol of the Funding (Sponsoring) Organization.

**Block 8.c.** Enter the address of the Funding (Sponsoring) Organization. Include city, state and ZIP code.

**Block 9.** Procurement Instrument Identification Number (Contract, Grant, or other Funding Instrument): For a contractor or grantee report, enter the complete contract or grant number(s) under which the work was accomplished. Leave this block blank for in-house reports.

**Block 10.** Source of Funding (Program Element, Project, Task Area, and Work Unit Number(s)): These four data elements relate to the DoD budget structure and provide program and/or administrative identification of the source of support for the work being carried on. Enter the program element, project, task area, work unit number, or their equivalents that identify the principal source of funding for the work required. These codes may be obtained from the applicable DoD forms such as the DD Form 1498 (Research and Technology Work Unit Summary) or from the fund citation of the funding instrument. If this information is not available to the authoring activity, these blocks should be filled in by the responsible DoD Official designated in Block 22. If the report is funded from multiple sources, identify only the Program Element and the Project, Task Area and Work Unit Numbers of the principal contributor.

**Block 11.** Title and Its Security Classification: Enter the title in Block 11 in initial capital letters exactly as it appears on the report. Titles on all classified reports, whether classified or unclassified, must be immediately followed by the security classification of the title enclosed in parentheses. A report with a classified title should be provided with an unclassified version if it is possible to do so without changing the meaning or obscuring the contents of the report. Use specific, meaningful words that describe the content of the report so that when the title is machine-indexed, the words will contribute useful retrieval terms.

If the report is in a foreign language and the title is given in both English and a foreign language, list the foreign language title first, followed by the English title enclosed in parentheses. If part of the text is in English, list the English title first followed by the foreign language title enclosed in parentheses. If the title is given in more than one foreign language, use a title that reflects the language of the text. If both the text and titles are in a foreign language, the title should be translated, if possible, unless the title is also the name of a foreign periodical. Transliterations of often used foreign alphabets (see Appendix A of MIL-STD-847B) are available from DTIC in document AD-A080 800.

**Block 12.** Personal Author(s): Give the complete name(s) of the author(s) in this order: last name, first name and middle name. In addition, list the affiliation of the authors if it differs from that of the performing organization.

List all authors. If the document is a compilation of papers, it may be more useful to list the authors with the titles of their papers as a contents note in the abstract in Block 19. If appropriate, the names of editors and compilers may be entered in this block.

**Block 13.a.** Type of Report: Indicate whether the report is summary, final, annual, progress, interim, etc.

**Block 13.b.** Period of Time Covered: Enter the inclusive dates (year, month, day) of the period covered, such as the life of a contract in a final contractor report.

**Block 14.** Date of Report: Enter the year, month, and day, or the year and the month the report was issued as shown on the cover.

**Block 15.** Page Count: Enter the total number of pages in the report that contain information, including cover, preface, table of contents, distribution lists, partial pages, etc. A chart in the body of the report is counted even if it is unnumbered.

**Block 16.** Supplementary Notation: Enter useful information about the report in hand, such as: "Prepared in cooperation with . . ." "Translation of (or by) . . ." "Symposium . . ." If there are report numbers for the report which are not noted elsewhere on the form (such as internal series numbers or participating organization report numbers) enter in this block.

**Block 17.** COSATI Codes: This block provides the subject coverage of the report for announcement and distribution purposes. The categories are to be taken from the "COSATI Subject Category List" (DoD Modified), Oct 65, AD-624 000. A copy is available on request to any organization generating reports for the DoD. At least one entry is required as follows:

Field — to indicate subject coverage of report.

Group — to indicate greater subject specificity of information in the report.

Sub-Group — if specificity greater than that shown by Group is required, use further designation as the numbers after the period (.) in the Group breakdown. Use only the designation provided by AD-624 000.

Example: The subject "Solid Rocket Motors" is Field 21, Group 08, Subgroup 2 page 32, AD-624 000.

**Block 18.** Subject Terms: These may be descriptors, keywords, posting terms, identifiers, open ended terms, subject headings, acronyms, code words, or any words or phrases that identify the principal subjects covered in the report, that conform to standard terminology and exact enough to be used as subject index entries. Certain acronyms or "buzz words" may be used if they are recognized by specialists in the field and have a potential for becoming accepted terms. "Laser" and "Reverse Osmosis" were once such terms.

If possible, this set of terms should be selected so that the terms individually and as a group will remain UNCLASSIFIED without losing meaning. However, priority must be given to specifying proper subject terms rather than making the set of terms appear "UNCLASSIFIED". Each term on classified reports must be immediately followed by its security classification, enclosed in parentheses.

For reference on standard terminology the "DTIC Retrieval and Indexing Terminology" DRIT-1979, AD-A068 500, and the DoD "Thesaurus of Engineering and Scientific Terms (TEST) 1968, AD-672 000, may be useful.

**Block 19. Abstract:** The abstract should be a pithy, brief (*preferably not to exceed 300 words*) factual summary of the most significant information contained in the report. However, since the abstract may be machine-searched, all specific and meaningful words and phrases which express the subject content of the report should be included, even if the word limit is exceeded.

If possible the abstract of a classified report should be unclassified and consist of publicly releasable information (*Unlimited*), but in no instance should the report content description be sacrificed for the security classification.

**NOTE:** AN UNCLASSIFIED ABSTRACT DESCRIBING A CLASSIFIED DOCUMENT MAY APPEAR SEPARATELY FROM THE DOCUMENT IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT OR BIBLIOGRAPHIC PRODUCTS OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE DEFENSE RDT&E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS.

For further information on preparing abstracts, employing scientific symbols, verbalizing, etc., see paragraph 2.1(n) and 2.3(b) in MIL-STD-847B.

**Block 20. Distribution/Availability of Abstract:** This block must be completed for all reports. Check the applicable statement either "unclassified/unlimited" or "same as report," or if the report is available to DTIC registered users "Abstract available to DTIC users."

**Block 21. Abstract Security Classification:** To ensure proper safeguarding of information, this block must be completed for all reports to designate the classification level of the entire abstract. For CLASSIFIED abstracts, each paragraph must be preceded by its security classification code in parentheses.

**Blocks 22.a,b,c.** Give name, telephone number and office symbol respectively of DoD person responsible for the accuracy of the completion of this form.



Electrochemistry of Sulfur,  $\text{Na}_2\text{S}$ ,  $\text{S}_2$ ,  $\text{S}_2\text{Cl}_2$  and  $\text{CS}_2$   
in 1-Methyl-3-Ethylimidazolium Chloride-Aluminum Chloride Melts

By

B. J. Piersma

J. S. Wilkes

Approved for public release; distribution unlimited.

Directorate of Chemical Sciences  
The Frank J. Seiler Research Laboratory  
Air Force Systems Command  
U. S. Air Force Academy, Colorado 80840



Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

## TABLE OF CONTENTS

Summary. . . . .	11
Preface. . . . .	iii
List of Tables . . . . .	iv
Introduction . . . . .	1
Experimental . . . . .	2
Results. . . . .	3
Discussion . . . . .	8
Conclusions. . . . .	12
References . . . . .	14
Illustrations. . . . .	16

## SUMMARY

The electrochemical behavior of sulfur, sodium sulfide, sulfur monochloride and carbon disulfide was studied on a glassy carbon electrode at 25° C in 1-methyl-3-ethylimidazolium chloroaluminate melts in basic (excess organic chloride), neutral (1:1 mole ratio of organic chloride and  $\text{AlCl}_3$ ) and acidic (excess  $\text{AlCl}_3$ ) regions. Cyclic voltammetry, rotating disk electrode and steady-state potentiostatic techniques were used in the study. The literature on sulfur and sulfur compounds in  $\text{NaCl-AlCl}_3$  melts is reviewed and comparisons are made with the room temperature melts.

## PREFACE

The work described in the report was initiated in the Electrochemistry Division at FJSRL by Dr. Piersma, a visiting professor under the University Resident Research Program of the Office of Scientific Research, in 1981-82. This report was completed when B. J. P. participated in the Summer Faculty Research Program sponsored by the Air Force Office of Scientific Research/AFSC, United States Air Force, under contract F49620-85-C-0013.

## LIST OF TABLES

- I Potentials of Cyclic Voltammetric Current Peaks
- II Effect of Sulfur Compounds on Electrochemical Windows
- III Kinetic Parameters Derived from Cyclic Voltammetry
- IV Parameters Derived from Rotating Disk Electrode Voltammetry
- V Summary of Cyclic Voltammetric Results in  $\text{NaCl-AlCl}_3$  Melts

## INTRODUCTION

The chemical properties and electrochemical behavior of sulfur and sulfur compounds have been studied in NaCl-AlCl<sub>3</sub> molten salts over the temperature range 150-250° C by several research groups within the past several years.(1-6) Depending on melt acidity and temperature, all of the following sulfur species have been proposed in chloroaluminate melts: S<sub>8</sub>, S<sub>16</sub><sup>2+</sup>, S<sub>8</sub><sup>+</sup>, S<sub>12</sub><sup>2+</sup>, S<sub>2</sub> Cl<sup>+</sup>, S<sub>8</sub><sup>2+</sup>, S<sub>4</sub><sup>+</sup>, S<sub>4</sub><sup>2+</sup>, S<sub>2</sub><sup>2+</sup>, S(II), SCl<sub>3</sub><sup>+</sup> and S(IV). It has been suggested that S<sub>8</sub><sup>+</sup> is the species of lowest valence, next to elemental sulfur, and that the existence of S<sub>16</sub><sup>2+</sup> is unlikely (6). Fehrmann, et al. (6) also show that S<sub>8</sub><sup>2+</sup> is not an important species in these melts. Sulfur can be reduced to S<sup>2-</sup> and there is no evidence for the formation of polysulfides. (2,5) Mamantov (5) has suggested that in basic melt, the highest oxidation state for sulfur is the species S<sub>2</sub><sup>2+</sup>, at least at lower temperatures. In acidic melts, the highest oxidation state is S(IV) (5,6). It has also been suggested that in these melts, sulfide interacts with chloroaluminate to form AlSCl in acidic melt and AlSCl<sub>2</sub><sup>-</sup> in basic melt (2). Reaction schemes have been suggested for the electrode reactions of sulfur in basic (1) and in acidic (5) melts.

In this paper we report our study of sulfur, Na<sub>2</sub>S, S<sub>2</sub>Cl<sub>2</sub> and CS<sub>2</sub> in a new room temperature chloroaluminate molten salt. We have observed significant differences in the reported behavior of sulfur compounds in NaCl-AlCl<sub>3</sub> melts and our results in room temperature 1-methyl-3-ethylimidazolium chloride(MeEtImCl)-AlCl<sub>3</sub> melts. In general, the electrochemical processes with sulfur compounds in room temperature melts are highly irreversible. We also observed that the presence of sulfur or sulfur compounds tends to extend

the electrochemical windows, e.g., in acidic melts the overpotential for aluminum deposition is increased by up to 300mv.

## EXPERIMENTAL

Aluminum chloride (Fluka, AG) was purified and MeEtImCl was synthesized and recrystallized following procedures established in this laboratory (7).  $S_2Cl_2$  (Eastman),  $Na_2S$  (Baker), sulfur (Sargent-Welch) and  $CS_2$  (Aldrich) were used, after drying, without further treatment. All melts were prepared and all experiments performed in a Vacuum Atmosphere Corp. controlled environment system in a dry argon atmosphere having <10 ppm water and oxygen. A simple pyrex glass cell with Teflon lid, containing a large tungsten foil counter electrode and a Pine Instruments glassy carbon working electrode (geometric area = 0.459cm<sup>2</sup>), was used for cyclic voltammetric and rotating disc electrode voltammetric studies. Other measurements were carried out with a two-compartment cell having anode and cathode separated by a fine porosity glass frit. The reference electrode for all measurements was a coiled Al wire (Alfa) immersed in 0.6 melt (60 mole %  $AlCl_3$ /40 mole % MeEtImCl) contained in a separate pyrex glass tube with a fine porosity glass frit. Al wires were cleaned in aqueous 5% HF/15%  $HNO_3$  for 5 seconds to remove oxide and rinsed with absolute ethanol just prior to being placed in the dry box. The temperature was maintained at  $25 \pm 1^\circ C$ .

A PAR/EGG model 173 potentiostat was used with a PAR model 165 universal programmer and a Houston Omnigraphic model 2000 X-Y recorder. Dana model 5900 digital multimeters were used to measure potential and current and a Hewlett-Packard model 7100 BM strip chart recorder was used to record steady-state currents. A Pine Instrument Co. electrode rotator was used for

rotating disc electrode (RDE) studies. Titration of the basic melt with  $\text{TiCl}_4$  following the method of Osteryoung (8) indicated oxide levels in our melts on the order of 3-5 mM oxide.

## RESULTS

Elemental sulfur is readily soluble up to 40 mM in basic and neutral melts at 25°C to give a clear, colorless solution. Higher sulfur concentrations in the melts are obtained at 25°C by stirring several hours. In acidic melts, sulfur dissolves more readily and gives a clear yellow solution. With heating to approximately 75°C, concentrations (based on monatomic sulfur) of greater than 0.4 molar were obtained. Sulfur appears to be stable in all melts examined, at least over a period of several days. Liquid  $\text{S}_2\text{Cl}_2$  is readily soluble at 25°C yielding clear yellow solutions in basic and neutral melts. A dark reddish-brown solution results in acidic melt.  $\text{S}_2\text{Cl}_2$  reacts chemically in acidic melt, e.g., the cathodic current peak observed with cyclic voltammetry for 35 mM  $\text{S}_2\text{Cl}_2$  decreases with time and is absent after 4 hours.  $\text{Na}_2\text{S}$  is dissolved only with difficulty and only to the extent of about 30 mM at 25°C in acidic melt, but readily dissolves when the melt is heated to 60°C, and yields a clear, slightly yellow solution. The sulfide species formed by dissolving  $\text{Na}_2\text{S}$  in acidic melt reacts chemically with the melt, e.g., the change in anodic current peak shows a loss in oxidizable sulfide from 25mM to 10mM over a period of 72 hours. The solubility of  $\text{Na}_2\text{S}$  is much less in basic melt with less than 1mM solution resulting after 5 hours of stirring at 25°C.  $\text{Na}_2\text{S}$  is slightly more soluble at higher temperatures (60-70°C) (e.g., the increased solubility permits the observation of some redox behavior with



cyclic voltammetry at higher temperatures), however the salt precipitates out as the melt is cooled to 25°C.

Liquid CS<sub>2</sub> dissolves slowly in basic melt, requiring about 30 min of stirring at 25°C to give a 75mM solution which is clear and colorless. CS<sub>2</sub> is immediately soluble in acidic melt at much higher concentrations yielding a clear slightly yellow solution that appears to be stable, at least, for 8-10 hours.

#### CYCLIC VOLTAMMETRY

##### Na<sub>2</sub>S (Figs. 1 & 2)

CV curves for Na<sub>2</sub>S in 0.4 melt show no redox activity of sulfide at 25°C, even after several days of stirring. When the melt is heated to 75°C (Fig 1 & 6), oxidation of sulfide is observed at +0.6V. The oxidation is irreversible and no evidence of reduction, other than of the melt, is observed. In 0.6 melt, where Na<sub>2</sub>S is more soluble, an oxidation peak is observed at 25°C at about +2.0V. There are slight indications of reduction peaks on the cathodic sweep at 1.5V, 0.85V, 0.3V and -0.1V.

##### Sulfur (Figs. 3-6)

In 0.4 melt, sulfur has a large irreversible reduction peak at about -0.67V, and oxidation appears to occur at the melt limit. When the anodic limit is extended (Fig 3b) several additional reduction peaks are observed, i.e., at 0.55V, 0.45V, 0.2V, -0.55V, along with the major peak at -0.67V. In 0.6 melt, no reduction is observed until after sulfur is first oxidized. Details of the redox process (Fig 4b) give evidence for a single quasi-reversible oxidation and a single reduction peak on the reverse sweep

following oxidation. Fig (4a) shows that the presence of sulfur in the melt increases the overpotential for aluminum deposition by about 300mV. In a much more concentrated sulfur solution (at 75°C), three oxidation peaks and two reduction peaks are evident (cf. Fig. 5 and Table I). In 0.5 melt (Fig 6), three oxidation peaks are clearly seen with a broad peak at 1.54V and sharper peaks at 2.04 and 2.15V. On the reverse sweep, reduction occurs with a minor peak at 0.6V and a large peak at 0.2V.

#### $S_2Cl_2$ (Figs 7 & 8)

In basic melt (Fig 7a), no oxidation apart from the anodic melt limit was observed for  $S_2Cl_2$ . Four reduction peaks, with the major peak at -1.07V, were obtained in 0.4 melts (of Table I). In neutral melt (actually slightly acidic), a reduction peak at 0.3V increases by a factor of 4 following oxidation and a larger cathodic peak at -0.55V is not influenced by prior oxidation. The reduction product formed at potentials negative to -0.5V remains on the electrode surface and successive cycles show the decrease and disappearance of the -0.55 cathodic peak. Repeated cycling up to a cathodic limit of -0.5V has no effect on the other peaks. A large oxidation peak is observed in 0.5 melt at 1.45V, but is not present without prior reduction. Figure 8 for acidic melt shows an anodic peak of 2.10V, which is not present without prior reduction and a single large cathodic peak at 1.3V. The cathodic peak disappears after 2-3 hours indicating chemical interaction with the melt. The anodic peak remains after the cathodic peak has disappeared but is much smaller, e.g., after 2 hours the current is less than one-half its original value.

### CS<sub>2</sub> (Fig 10)

The CV for CS<sub>2</sub> in basic melt shows a cathodic peak at 1.23V and a broad anodic peak following reduction, beginning at about 0.0V. In acidic melt, a sharp anodic peak is observed at about 2.2V and no reduction is evident.

CV behavior for the 3 sulfur compounds and sulfur are summarized in Tables I-III. The differences observed for the anodic and cathodic peaks for S, Na<sub>2</sub>S and S<sub>2</sub>Cl<sub>2</sub> tend to suggest that the species resulting in the melts are not the same. The effects of sulfur species in increasing the overpotential for aluminum deposition are summarized in Table II. Kinetic parameters that could be derived from variation of sweep rates are summarized in Table III.

### RDE VOLTAMMETRY

Systems for which rotating disk electrode studies could be conducted and corresponding results are summarized in Table IV. For the other systems studied, no current plateaus, from which data could be obtained, were observed. Pure diffusion control was not obtained for any of the systems studied. S<sub>2</sub>Cl<sub>2</sub> in basic melt provided interesting results which are shown in Fig 9. The potential at which the second current plateau begins is dependent on electrode rotation rate and is proportional to  $\omega^{-1/2}$  (cf. Fig. 11). The limiting currents for the two processes are proportional to  $\omega^{1/2}$ , however, the  $i$  vs  $\omega^{1/2}$  plots do not extrapolate through zero, indicating mixed kinetic and diffusion control. Diffusion coefficients were not calculated for most sulfur species since diffusion control was not obtained. For S in 0.5 melt and S<sup>2-</sup> in 0.6 melt the diffusion coefficients (see Table IV) are on the same order of magnitude as those for Fe<sup>3+</sup> and Cu<sup>2+</sup>. (9,10) A value of  $D = 3 \times 10^{-6} \text{ cm}^2 \text{ sec}^{-1}$  has been reported for sulfide in PbCl<sub>2</sub> - KCl melt at 440°C. (11)

The standard heterogeneous rate constants were determined as previously (9,10), by extrapolating plots of  $\ln k_f$  vs  $E$  to  $E_{p/2}$ , with the assumption that the reactions are first order. Where comparisons can be made (i.e., for sulfur and  $\text{Na}_2\text{S}$  in acidic melt and for sulfur and  $\text{S}_2\text{Cl}_2$  in neutral melt) the significant differences in values for  $k_s$  are another indication that the species formed by dissolving sulfur,  $\text{Na}_2\text{S}$  and  $\text{S}_2\text{Cl}_2$  in the various melts are probably not the same.


#### STEADY STATE

The only system which gave reasonable steady state behavior with a reasonable Tafel slope was sulfur in acidic melt (of Fig 12). In neutral melt, the Tafel slope observed for oxidation of sulfur indicated that probably the product of oxidation was remaining on the electrode surface to some extent and the current appears to be limited by kinetic rather than diffusion control (Fig 13). No steady-states could be obtained with  $\text{S}_2\text{Cl}_2$  as  $\text{Na}_2\text{S}$ . While the data is very limited, determination of the reaction order from the slope of  $\ln i$  vs  $\ln C$  at a constant potential could be made for sulfur in neutral and acidic melts. The steady-state results can be summarized as follows:


System	$b_{\text{anodic}}$	$n_s$
sulfur/0.6 melt	RT/F	1
sulfur/0.5 melt	2RT/F	1

To understand the nature of the sulfur species and their redox behavior in room temperature melts, it will be helpful to briefly summarize that results reported for  $\text{NaCl-AlCl}_3$  melts. A summary of CV results is presented in Table V.


### Sulfide reacts with the melt

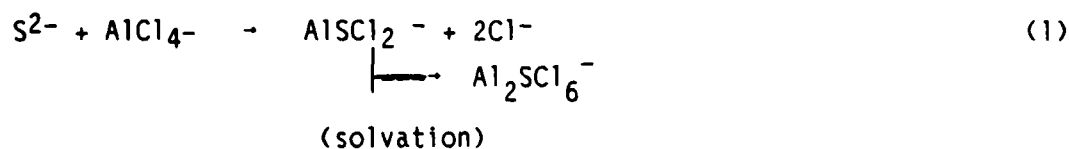

and as  $[S^{2-}]$  is increased, a chain-like structure is formed (13):




where  $n=3,4$  in dilute melts but approaches infinity as the  $[\text{AlSCl}_2^-]$  is increased. From analysis of  $\text{CsCl-AlCl}_3$  melts, Bjerium, et al. (13) found that





when 20% of the Al was in  $\text{AlCl}_4^-$  and 80% was  $[\text{Al}_n\text{S}_{n-1}]\text{Cl}_{2n+2}^{n-}$ .

Osteryoung (2,3) suggested that




with no evidence for polysulfide ions and that sulfur is oxidized to  $S_2^{2+}$ .

Mamantov, et al. (1) summarize their studies of sulfur in basic melt as:

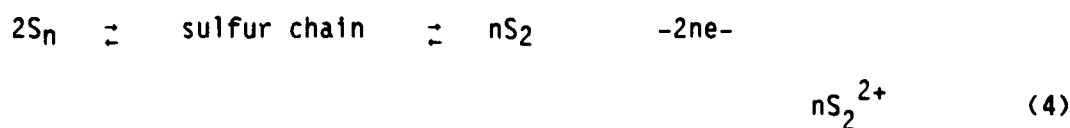


and



where n is most likely 8.


For oxidation of sulfide at lower temperature (175° C)




and at higher temperature (250° C)




In neutral melt, Bjerium, et al. (13) propose that:

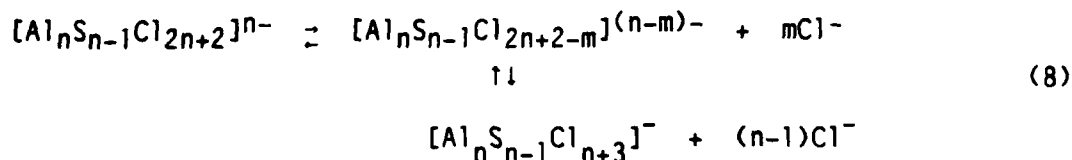

For example, when  $n = 3$ ,  $m = 1$ , the structure is

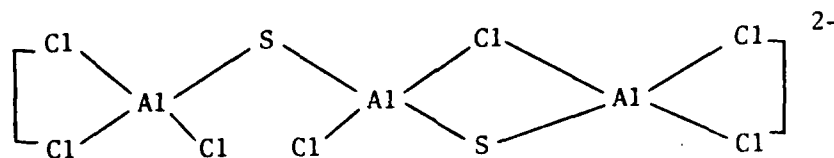

and when  $n = 3$ ,  $m = 2$



As the melt acidity is increased,  $n$  increases and the species approaches  $\text{AlSCl}$ , however, it was considered unlikely that isolated  $\text{AlSCl}$  molecules exist.

#### ACIDIC $\text{NaCl-AlCl}_3$ MELT

The following reactions are suggested for sulfur species in acidic melt, primarily from the work of Mamantov, et al. (5) and Bjerium, et al. (6):



Bjerium, et al. (6) argue that besides elemental sulfur, only the species  $S_8^+$ ,  $S_{12}^{2+}$  and  $S_4^+$  exist in acidic  $NaCl-AlCl_3$  melt at 150°C.

#### MeEtImCl- $AlCl_3$ MELTS


Sulfur species in MeEtImCl melts are, in general, not well behaved and the electrode reactions are highly irreversible. Our data permit only limited mechanism discussions for sulfur and sulfur monochloride in acidic and neutral melts.

#### OXIDATION OF SULFUR SPECIES

Similarities in the CV behavior of sulfur and  $S_2Cl_2$  suggest a common species. Following the proposal of Bjerium (13), we assume a species of the form  $AlSCl$ . The anodic oxidation appears to be first order in sulfur for both acidic and neutral melts, thus for a Tafel slope of 2 RT/F, the first electron transfer is the rate limiting step:




The Tafel slope determined from steady-state potentiostatic measurements for sulfur in acidic melt is RT/F and appears to be a real difference from the transient Tafel slope. In this case it would appear that a chemical step following eq. 12 is the rate limiting step, for example:






A second electron transfer is indicated by the presence of a 2nd anodic CV peak, thus:



#### REDUCTION OF SULFUR SPECIES

For both sulfur and  $\text{S}_2\text{Cl}_2$ , reduction in acidic melt appears to have a different rate determining step than reduction in neutral melt. A Tafel slope of  $2RT/F$  in acidic melt suggests that the first electron transfer is the rate limiting step, i.e.:



In neutral melt, the  $RT/F$  slope suggests a chemical step following eq. 15 is rate limiting:



This process is then followed by a faster electron transfer step.



#### CONCLUSIONS

1. The electrochemical behavior of sulfur and sulfur compounds is significantly different in room temperature MeEtImCl/ $\text{AlCl}_3$  melts than in

NaCl/AlCl<sub>3</sub> melts. Important differences are lack of solubility of Na<sub>2</sub>S and marked irreversibility of redox behavior in the room temperature melts.

2. The presence of sulfur species in the melts extends the electrochemical windows, particularly by increasing the overpotential for Al deposition in acidic melt.

3. Mechanisms for oxidation and reduction of sulfur and monochloride sulfur have been proposed for neutral and acidic melts. Sulfur and S<sub>2</sub>Cl<sub>2</sub> probably form similar species in the melt and undergo similar electrochemical processes.

4. Diffusion coefficients and standard heterogeneous rate constants were determined for some of the sulfur species and for different melt compositions.

5. Sulfur and the sulfur compounds examined here are probably not suitable as battery cathodes in MeEtImCl-AlCl<sub>3</sub> melts.

## REFERENCES

1. Marassi, R.; Mamantov, G.; Chambers, J. Q., J. Electrochem Soc., 123, 1128 (1976).
2. Paulson, K. A. and Osteryoung, R. A., J. American Chemical Soc., 98:22, 6866 (1976).
3. Robinson, J.; Gilbert, B.; and Osteryoung, R. A., Inorganic Chemistry, 16, 3040 (1977).
4. Fehrmann, R.; Bjerrum, N. J.; and Poulsen, F. W., Inorganic Chemistry, 17, 1195 (1978).
5. Marassi, R.; Mamantov, G.; Matsunaga, M.; Springer, S. E.; and Wiaux, J.P., J. Electrochem Soc., 126, 231 (1979).
6. Fehrmann, R.; Bjerrum, N. J.; and Pedersen, E., Inorganic Chemistry, 21, 1497 (1982).
7. Wilkes, J. S.; Levisky, J. A.; Wilson, R. A.; and Hussey, C. L., Inorganic Chemistry, 21, 1263 (1982).
8. Stojek, Z.; Linga, H.; and Osteryoung, R. A., J. Electroanal. Chem., 119, 365 (1981).

9. Piersma, B. J. and Wilkes, J. S., unpublished.
10. Piersma, B. J. and Wilkes J. S., FJSRL-TR-82-0004.
11. Plichon, V.; de Guibert, A.; and Moscardo-Levelut, M. N., Ionic Liquids, Inman, D. & Lovering, D. (eds.), Plenum Press (1981), pp 387-405.
12. Marassi, R.; Mamantov, G.; and Chambers, J. Q., Inorg. Nucl. Chem. Letters, 11, 245 (1975).
13. Berg, R. W.; von Winbush, S.; and Bjerrum, N. J., Inorganic Chemistry, 19, 2688 (1980).
14. Chum, H. L. and Osteryoung, R. A., Ionic Liquids, Inman, D. and Louering, D. (eds.), Phenum Press (1981), pp 407-423.

## ILLUSTRATIONS

Fig 1: C V of 7 mM  $\text{Na}_2\text{S}$  in 0.4 melt

(a) at 25°C

(b) at 75°C

Fig 2: C V of 25 mM  $\text{Na}_2\text{S}$  in 0.6 melt at 25°C

(a) melt without  $\text{Na}_2\text{S}$

(b) melt with  $\text{Na}_2\text{S}$

Fig 3: C V of 36 mM sulfur in 0.4 melt

(a) anodic sweep to +0.9v

(b) anodic sweep to +1.3v

Fig 4: C V of 0.6 melt saturated with sulfur at 25°C

(a) cathodic sweep showing Al depositions

(b) details of redox behavior

Fig 5: C V of 0.4 M sulfur in 0.6 melt at 75°C

Fig 6: C V of 24 mM sulfur in 0.5 melt

Fig 7: C V of  $\text{S}_2\text{Cl}_2$

(a) 31 mM  $\text{S}_2\text{Cl}_2$  in 0.4 melt

(b) 22 mM  $\text{S}_2\text{Cl}_2$  in 0.5 melt

Fig 8: C V of 35 mM  $S_2 Cl_2$  melt

Fig 9: RDE Curves for 3 mM  $S_2 Cl_2$  in 0.4 melt

Fig 10: C V of  $CS_2$

(a) 0.4 melt

(b) 0.6 melt

Fig 11: Dependence of potential at beginning of second current plateau on electrode rotation rate.

Fig 12: Study-state  $\log i$  vs E behavior for sulfur in 0.6 melt at 25°C.

( $\Delta$ ) 36 mM sulfur

( $\bullet$ ) 72 mM sulfur

Fig 13: Steady-state  $\log i$  vs E behavior for sulfur in 0.5 melt.

( $\Delta$ ) 9.8 mM sulfur

( $\bullet$ ) 48 mM sulfur

Table I  
Potentials of CV Current Peaks

System	Reduction	Oxidation
NA <sub>2</sub> S	----- 1.52V, 0.85V, 0.31V, -0.10V	0.69V (1) 2.02V
Sulfur	0.55, 0.45, 0.20, -0.55, -0.67(2) 0.57, 0.20 1.39 (3) 1.90, 1.45	at anodic melt limit 1.54, 2.04, 2.15 2.11, 2.24 2.03, 2.22, 2.39
0.4m S in 0.6 melt/75°C		
S <sub>2</sub> Cl <sub>2</sub>	-0.75, -0.95, -1.07, -1.45 0.30(4), -0.55 1.30	at anodic melt limit 1.45(5) 2.10(5)
C S <sub>2</sub>	-1.23(3) -----	0.45, 0.63 2.19

- (1) only observed at higher temperatures where NA<sub>2</sub>S becomes soluble  
(2) major peak and only peak present for lower anodic sweep limits  
(3) Present only after prior oxidation  
(4) Peak greatly increased after oxidation  
(5) not present without prior reduction

Table II  
Effect of Sulfur Compounds on Electrochemical Windows

<u>System</u>	<u>0.4 (basic) Melt</u>	<u>0.5 (neutral) Melt</u>	<u>0.6 (acidic) Melt</u>	<u>Al dep.</u>	<u>Al reoxid.</u>
MEIC/AlCl <sub>3</sub>	+0.97 to -1.60V	+1.20 to -1.20 V	+2.35 to -0.050V	-0.075V	+0.220V
with .30mM S	0.90 to -1.70	2.30 to -0.43*	2.52 to -0.33	-0.330	+0.210
with .30mM S <sub>2</sub> Cl <sub>2</sub>	0.95 to -1.95	1.90 to -0.60*	2.30 to -0.20	-0.200	+0.120
with .30mM NA <sub>2</sub> S	0.90 to -1.75	1.20 to -1.50	1.90 to -0.235	-0.235	+0.175

\* on acidic side of neutral



Table III  
Kinetic Parameters Derived from CV

System	$E_{p/2}$	$E_{p,c}$	$E_{p,a}$	$i_{p,a}/i_{p,c}$	$b_c$	$b_a$	$\alpha_c n_c$	$\alpha_a n_a$	$\frac{i_{p,c}}{v^{1/2}}$	$\frac{i_{p,a}}{v^{1/2}}$
10 mM S in 0.6 Melt	1.75	1.37V	2.11V	3.3	-135MV	119 mV	0.52	0.48	max at $v=10$	dec with inc $v$
24 mM S in 0.5 Melt	0.88	0.21	1.54	2.0	-72	123	0.57	0.43	~ const.	~ const.
35 mM S <sub>2</sub> Cl <sub>2</sub> in 0.6 Melt	1.68	1.28	2.09	1.2	-200	170	0.52	0.48	const.	max for $5 \leq v \leq 10$
22 mM S <sub>2</sub> Cl <sub>2</sub> in 0.5 Melt	0.91	0.31	1.49	3.9	-70	140	0.67	0.33	~ const.	~ const.

Table IV  
Parameters Derived from RDE Voltammetry

System	$i v_s w^{1/2}$	$D_O(\text{cm}^2/\text{sec})$	$D_R(\text{cm}^2/\text{sec})$	$k_g(\text{cm}/\text{sec})$	$\alpha_n$	n
0.6 Melt 100 mM S	Kinetic Control	--	--	$1.24 \times 10^{-5}$	0.42	--
0.5 Melt 25 - 50 mM S	Kinetic Control for $E = 1.8 - 2.2V$ Diffusion Control for $E > 2.2V$	--	$2.7 \times 10^{-7}$	$k_g(1) = 6.2 \times 10^{-7}$ $k_g(2) = 1.1 \times 10^{-5}$	0.47 0.42	-- --
0.5 Melt 22 mM $S_2Cl_2$	Kinetic Control	--	--	$k_g(\text{oxid}) = 2.3 \times 10^{-7}$ $k_g(\text{oxid}) = 1.9 \times 10^{-3}$	0.43 0.42	-- --
0.4 Melt 31 mM $S_2Cl_2$	Mixed Kinetic and diffusion Control	-- --	--	$k_g(1) = 4.5 \times 10^{-5}$ $k_g(2) = 6.3 \times 10^{-5}$	0.45	1
0.6 Melt 25 mM $NA_2S$	Kinetic Control diffusion Control at $E = 2.1V$	--	$7.0 \times 10^{-8}$	$3.2 \times 10^{-7}$	0.31	--

Table V  
Summary of CV Results in NaCl/AlCl<sub>3</sub> Melts

System	t	cathodic peaks	anodic peaks	rev. couple	secure
S/basic NaCl/AlCl <sub>3</sub>	175C	1.85V, 0.92V, 0.50V	1.930, 1.25V	(1.85/1.93)	Mamantov (1975)
S/acidic NaCl/AlCl <sub>3</sub>	175C	1.88, 1.78, 0.81, 0.47	1.98, 1.51	(1.88/1.98)	Mamantov (1975)
S/basic NaCl/AlCl <sub>3</sub>	175C	1.80, 0.6	2.02, 1.42	guerirri	Mamantov (1976)
Na <sub>2</sub> S/basic NaCl/AlCl <sub>3</sub>	257C	1.83, 1.05	1.91, 1.21	(1.83/1.91) (1.05/1.21)	Mamantov (1976)
Na <sub>2</sub> S/acidic NaCl/AlCl <sub>3</sub>	175C	2.39, 2.26, 1.38	2.53, 1.92	(2.39/2.53)	Osteryoung (1976)
S/basic NaCl/AlCl <sub>3</sub>	175C	1.79, 0.60	2.13, 1.53	inev	Osteryoung (1976)
Na <sub>2</sub> S/basic NaCl/AlCl <sub>3</sub>	175C	1.95, 0.55	2.10, 1.58	very small redn pks	Osteryoung (1976)
S <sub>2</sub> Cl <sub>2</sub> /basic NaCl/AlCl <sub>3</sub>	175c	1.93, 0.94	2.02, 1.48	(1.93/2.02)	Osteryoung (1976)
S/acidic NaCl/AlCl <sub>3</sub>	250c	1.86, 1.75 1.08 minor peak at 1.45	1.95, 1.83 1.28 minor peak at 1.55	(1.86/1.95) (1.75/1.83)	Mamantov (1974)

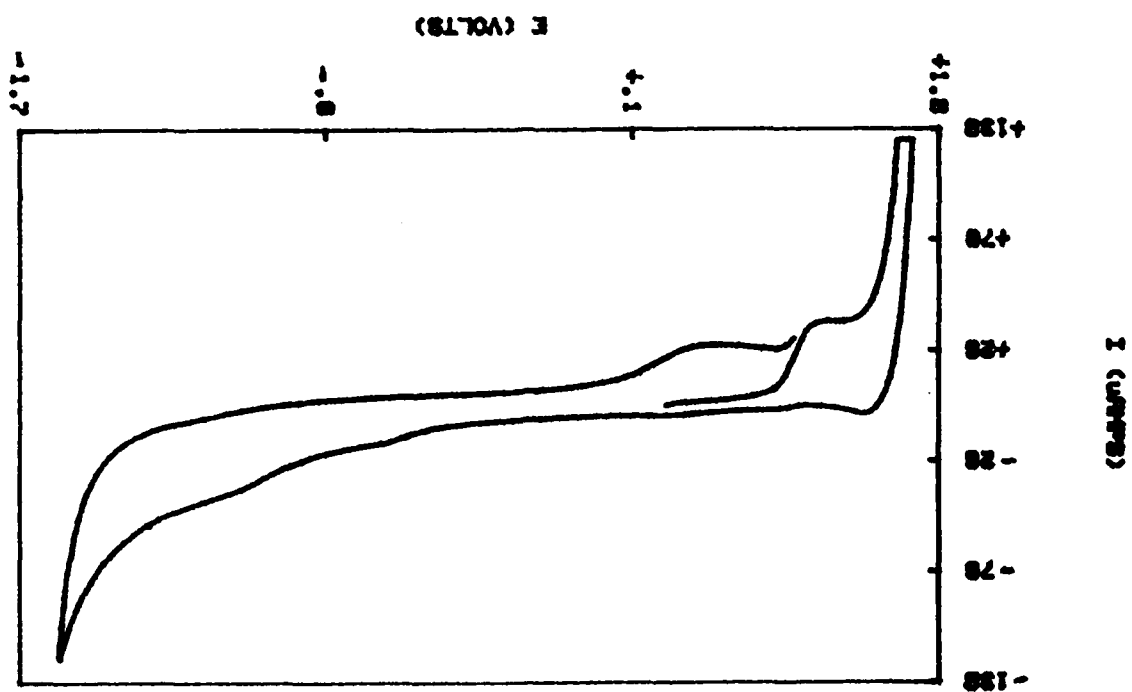


FIG 1(b) CV OF  $\text{Na}_2\text{S}$  IN 8.4 M LiCl AT 25°C

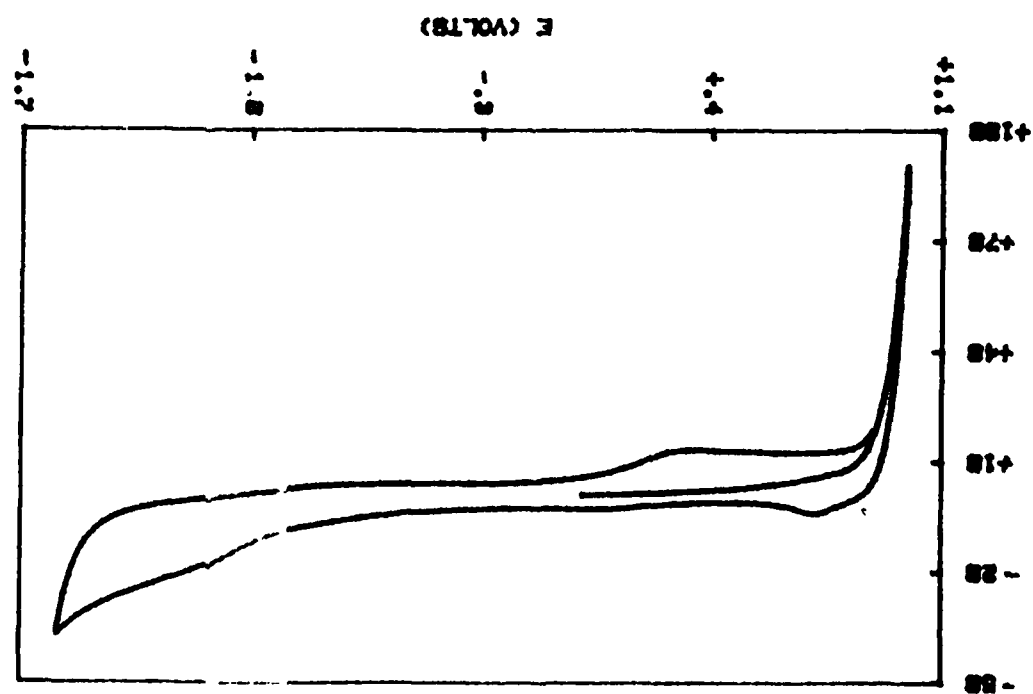


FIG 1(a) CV OF  $\text{Na}_2\text{S}$  IN 8.4 M LiCl AT 25°C

FIG 2(a) CV OF S.S MELT

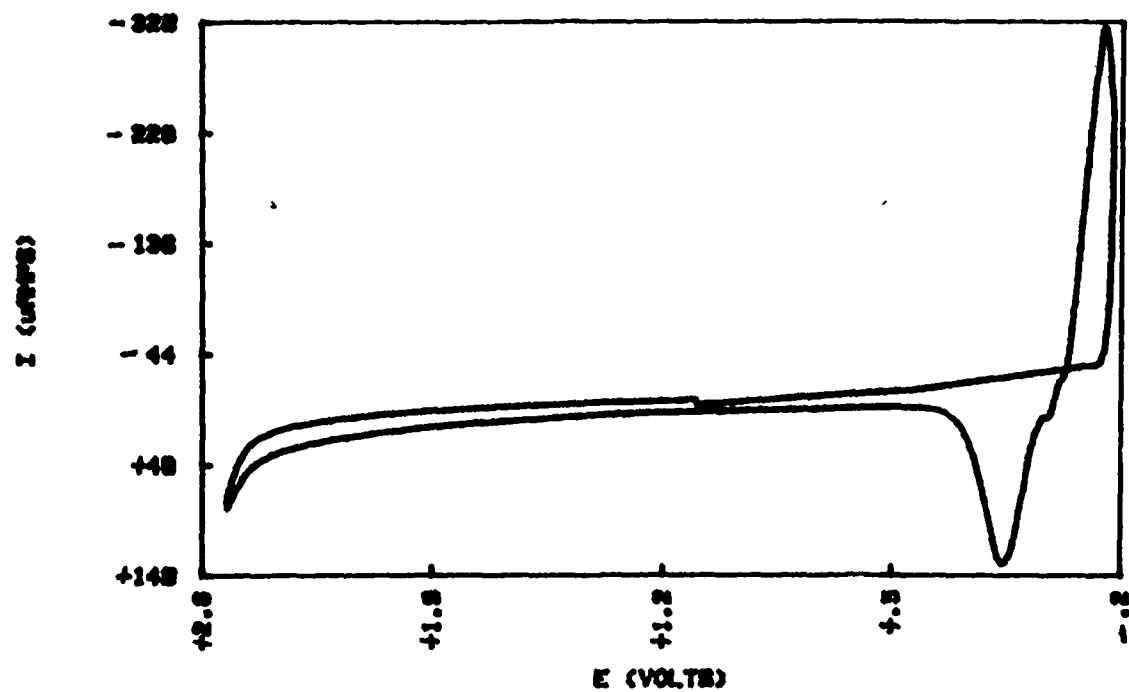


FIG 2(b) CV OF Na<sub>2</sub>S IN S.S MELT

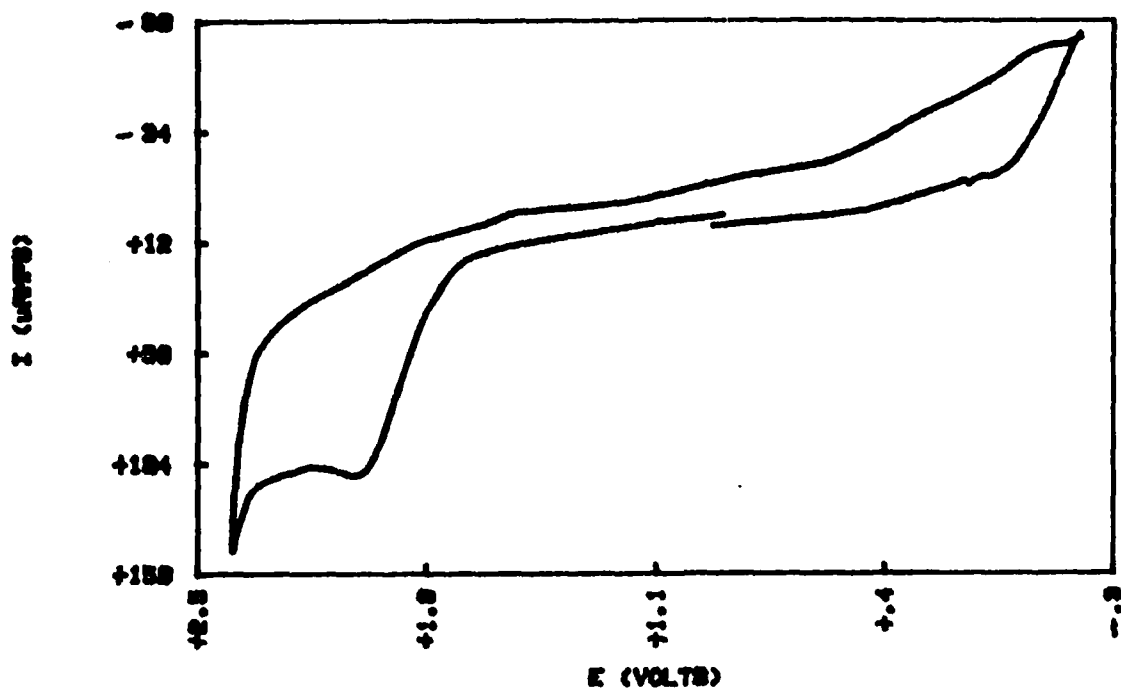


FIG 3(a) CV OF SULFUR IN 8.4 MELT

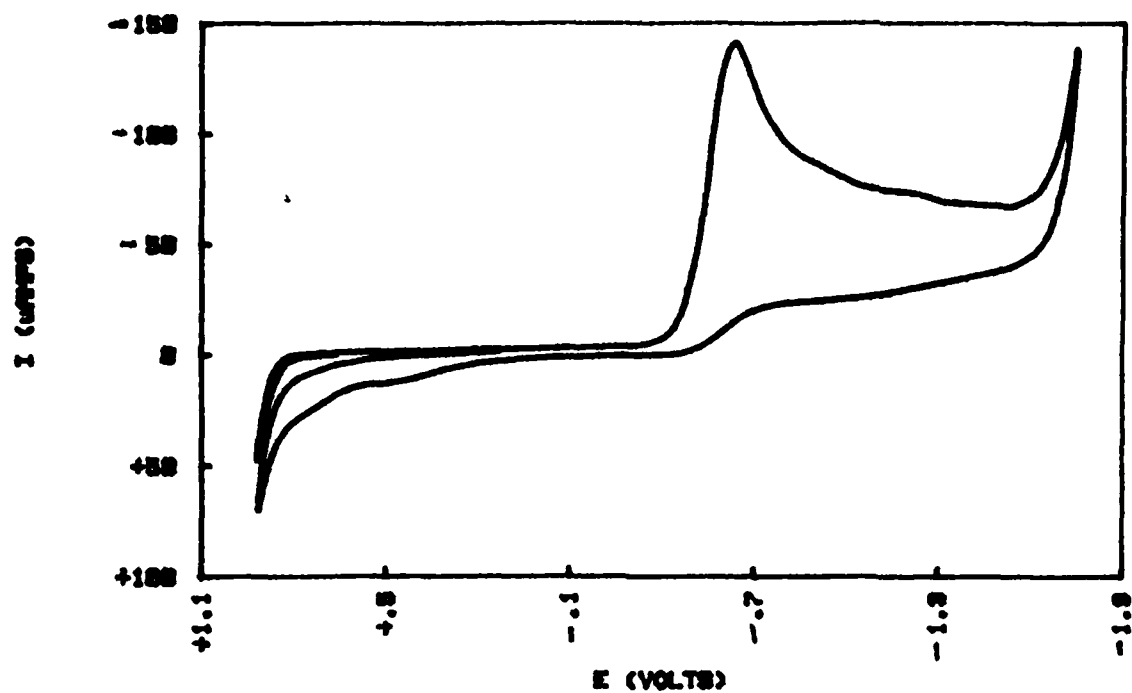


FIG 3(b) CV OF SULFUR IN 8.4 MELT

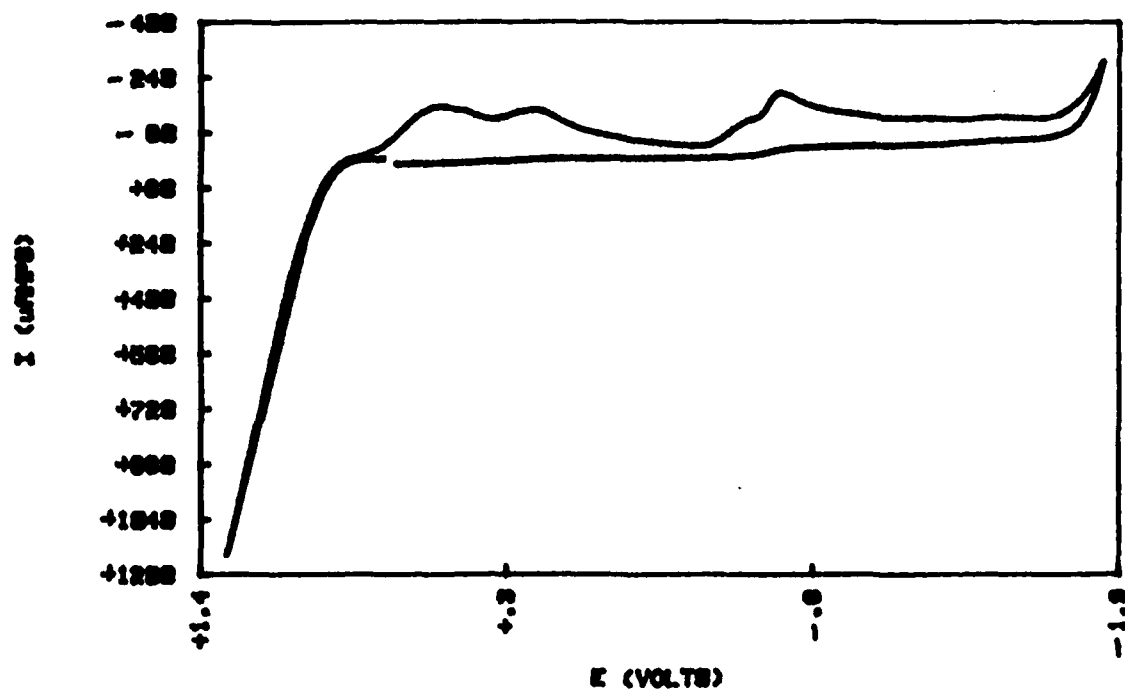


FIG 4(a) CV OF SULFER IN S.S MELT

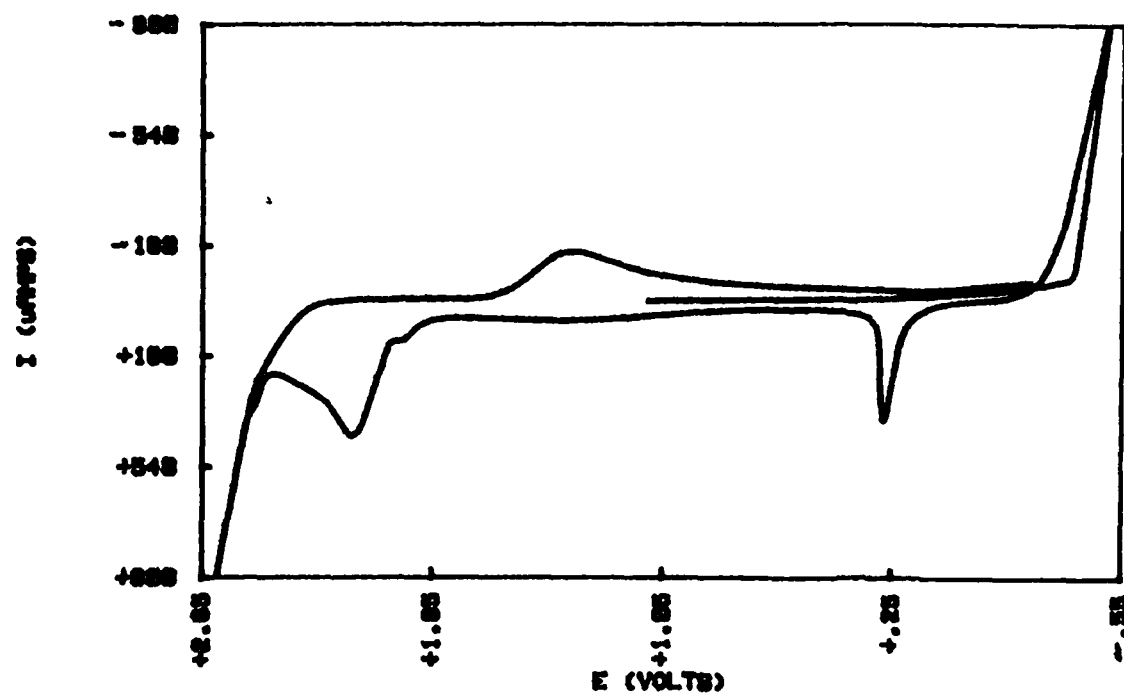


FIG 4(b) CV OF SULFER IN S.S MELT

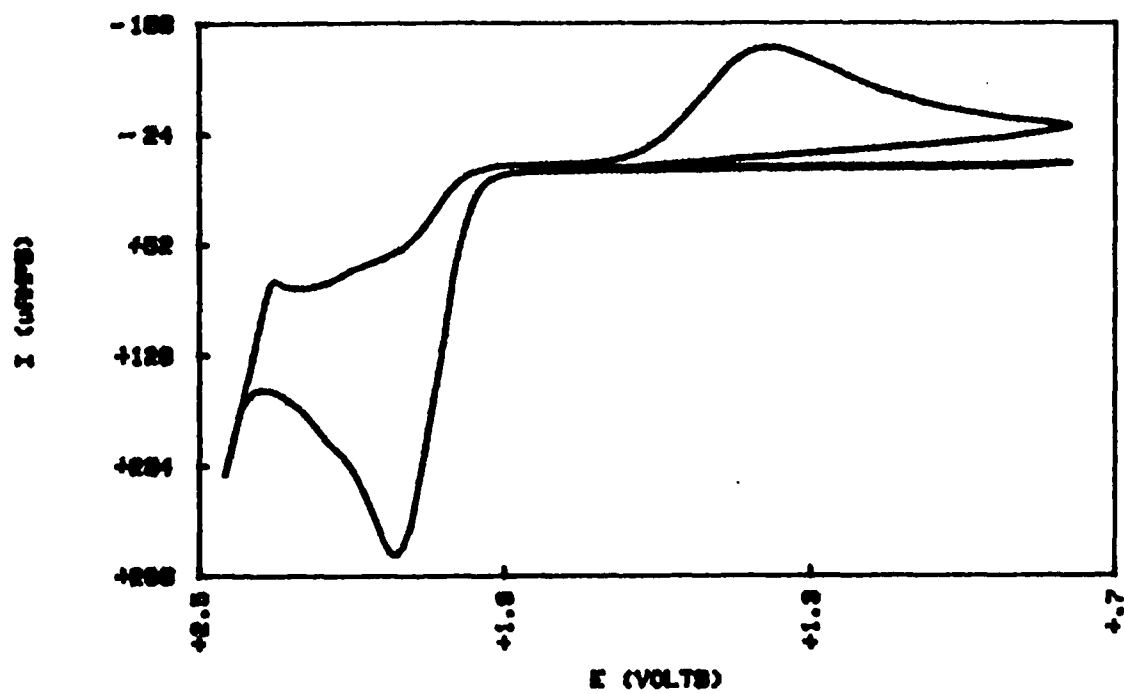


FIG 5 CV OF SULFUR IN 8.6 MELT AT 75 C

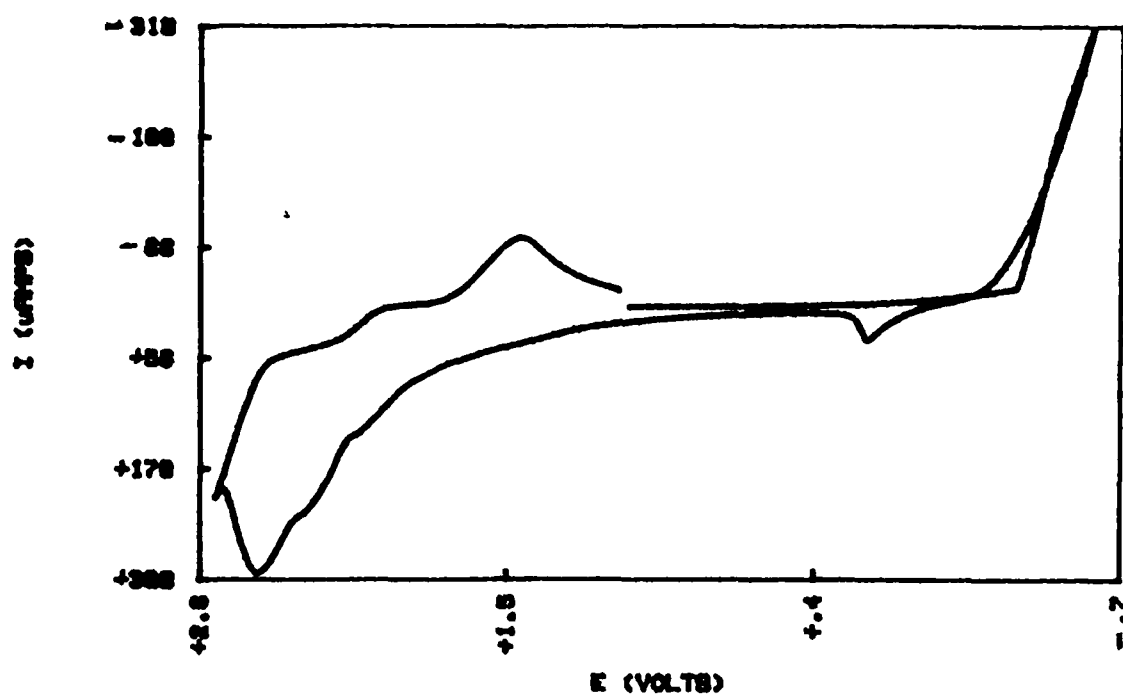


FIG 6 CV OF SULFUR IN 8.5 MELT

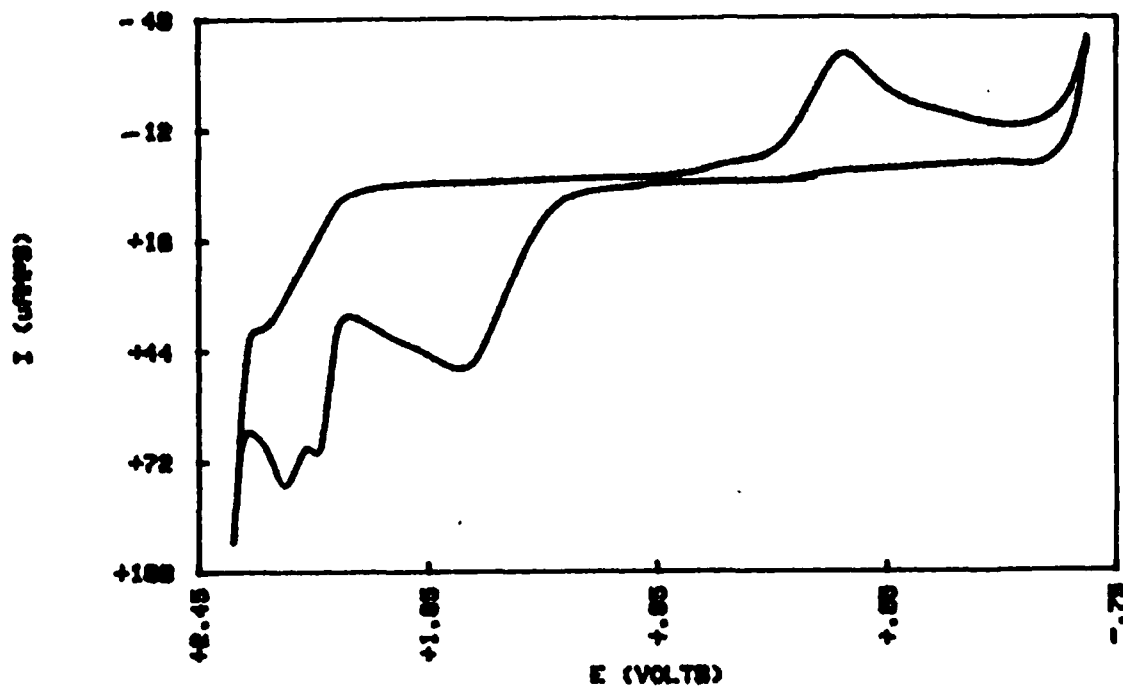




FIG 7(a) CV OF B2C12 IN 8.4 MELT

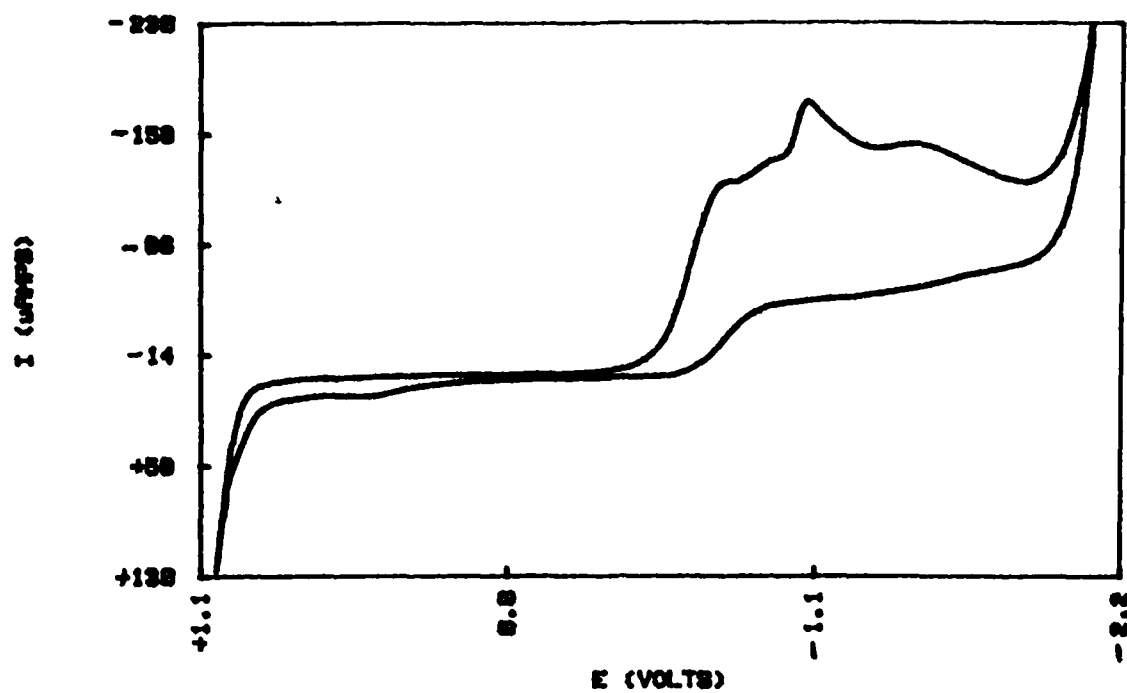


FIG 7(b) CV OF B2C12 IN 8.5 MELT

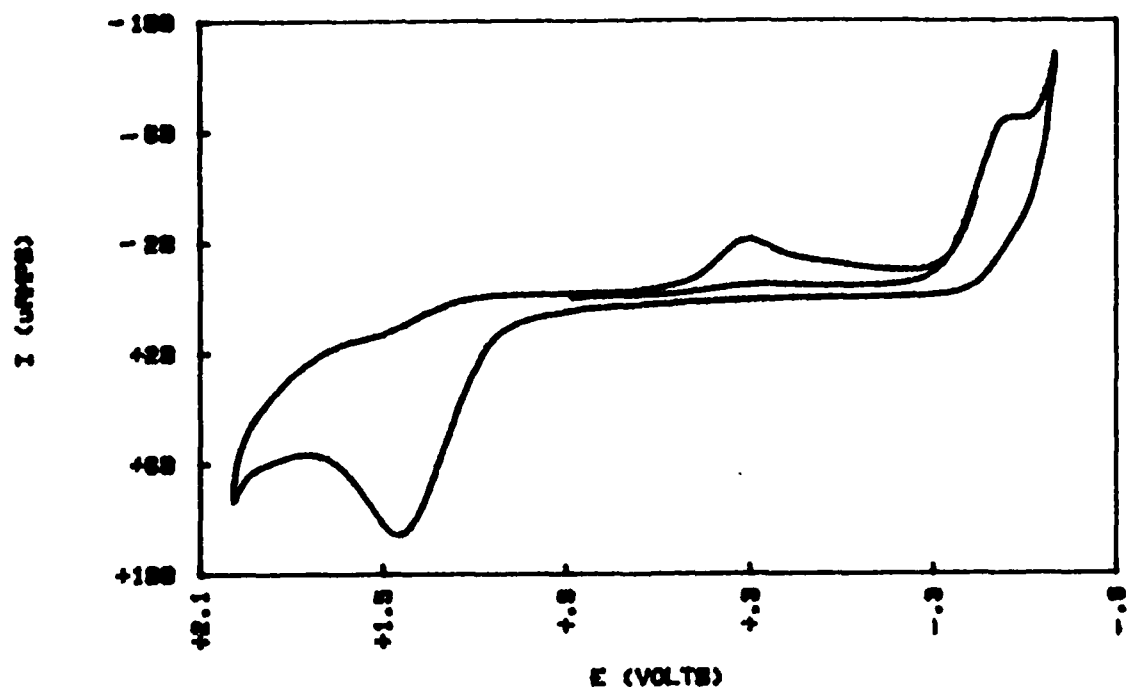


FIG 8 CV OF S2C12 IN 0.8 MELT

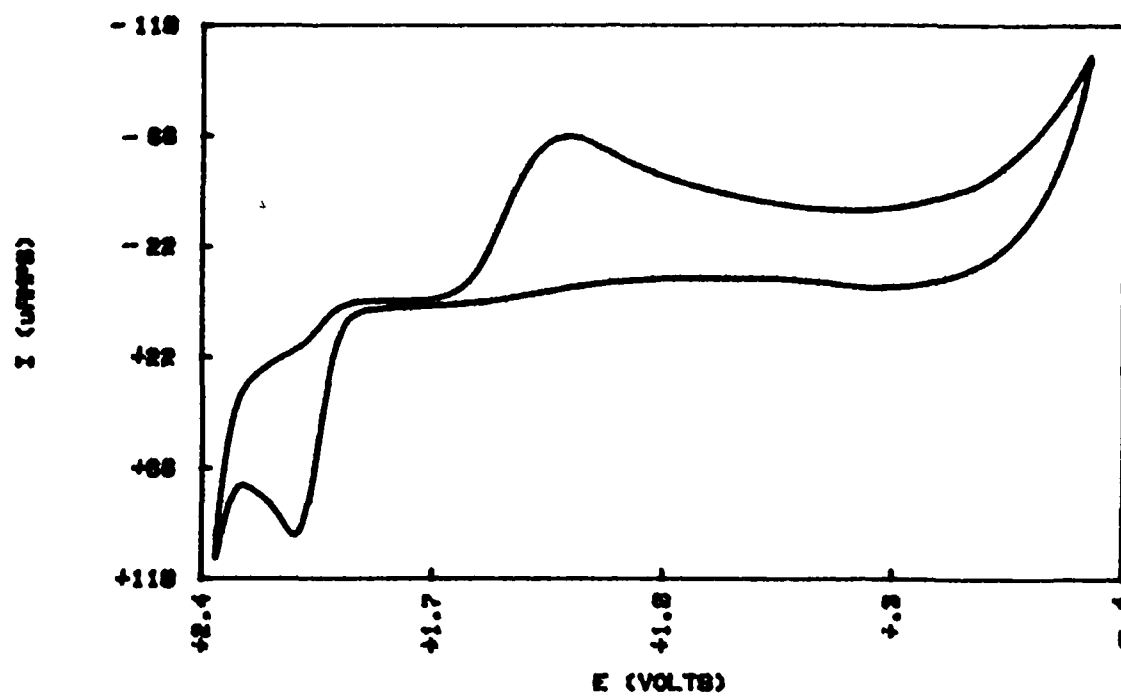


FIG 9 RDE OF S2C12 IN 0.4 MELT

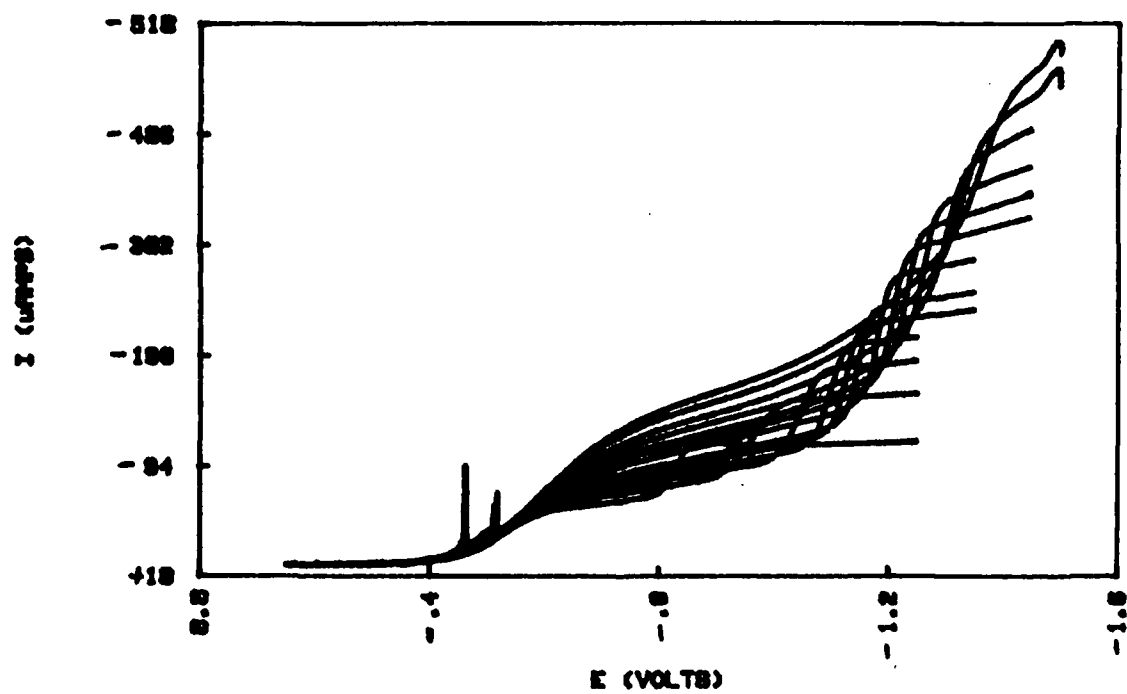
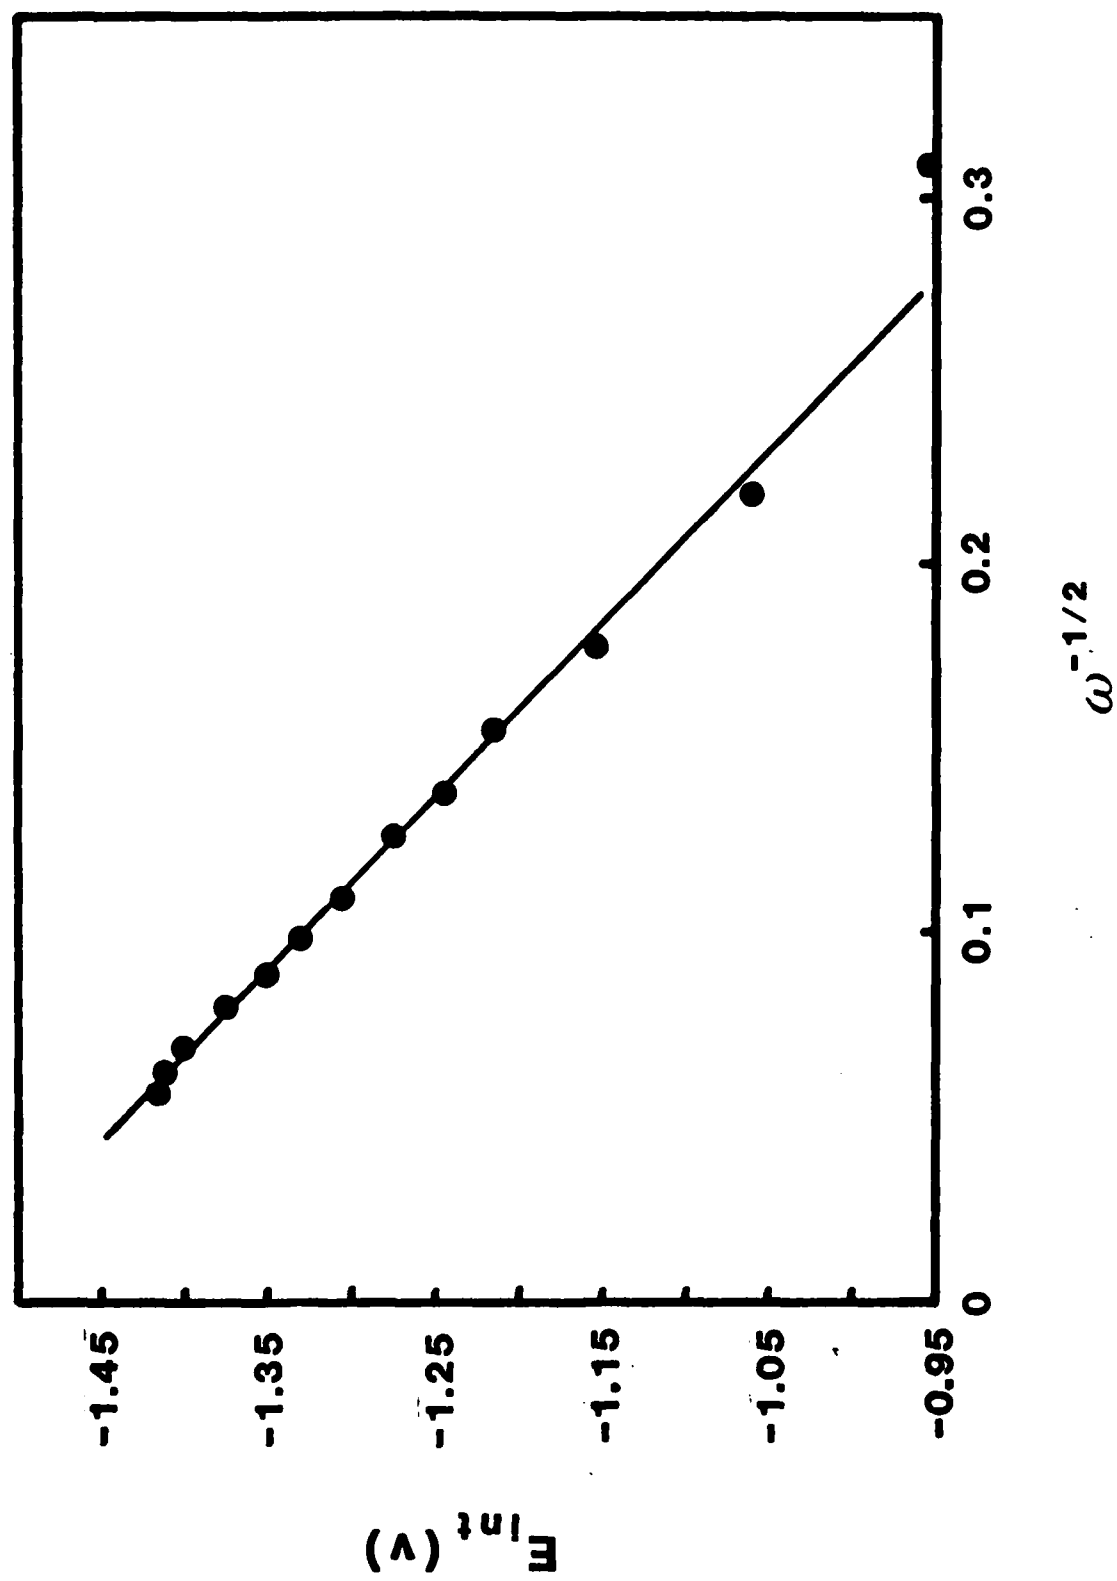


FIGURE 11



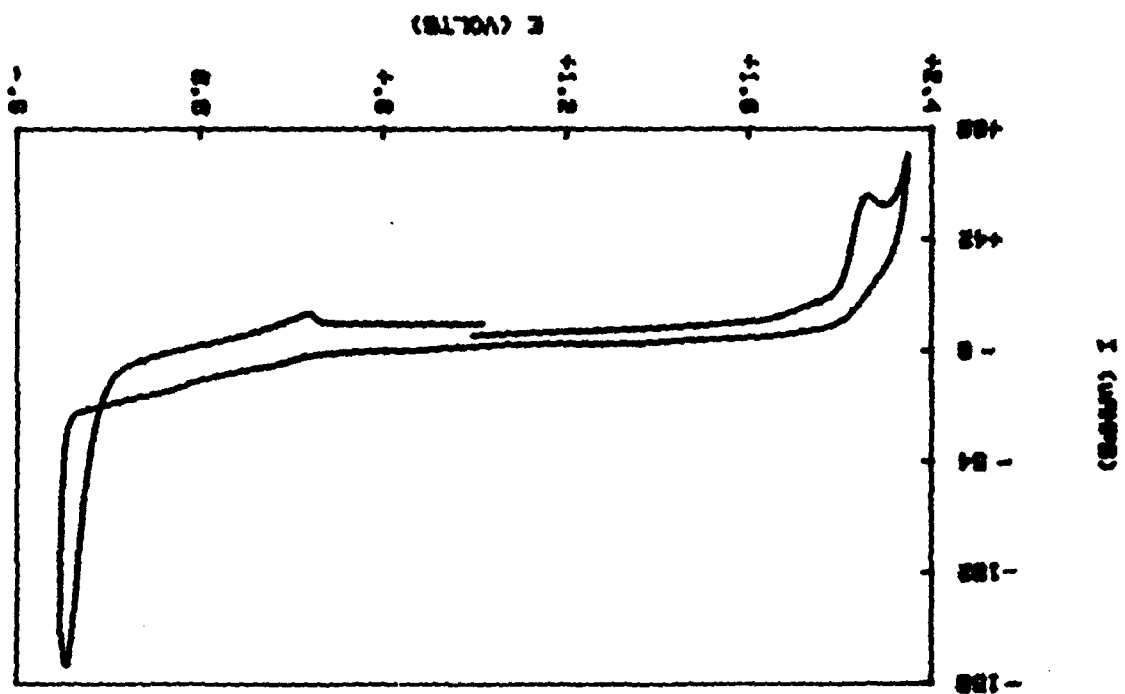


FIG 18(b) CV OF CBS IN 0.8 M LiClO<sub>4</sub>

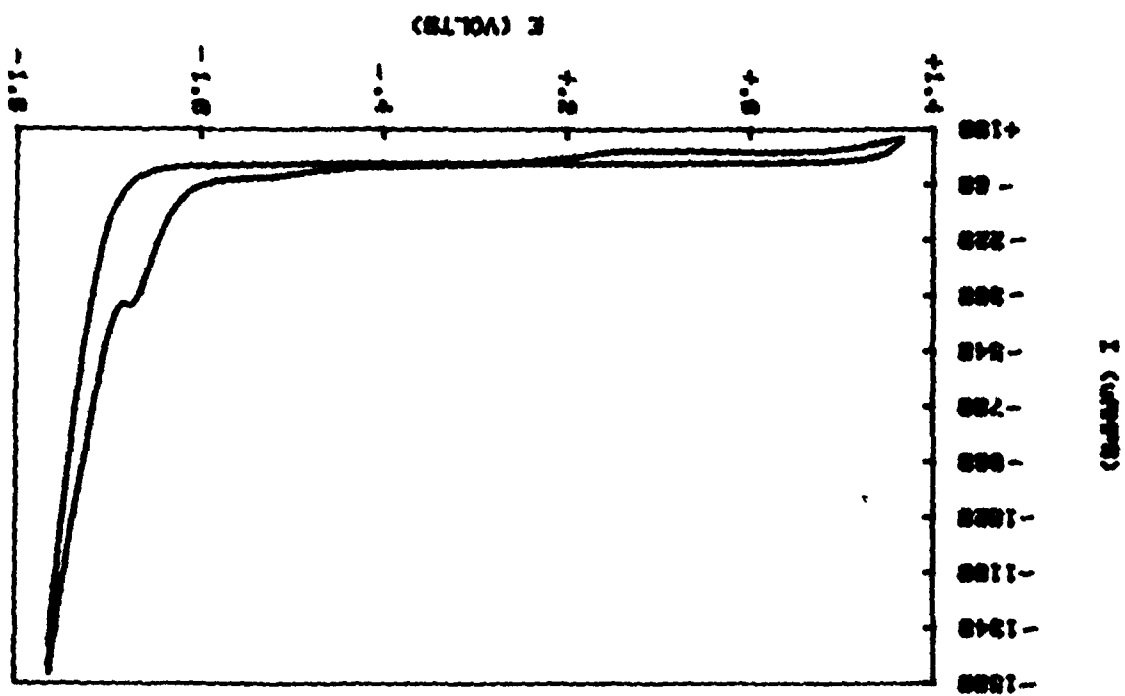


FIG 18(a) CV OF CBS IN 0.4 M LiClO<sub>4</sub>

FIGURE 12


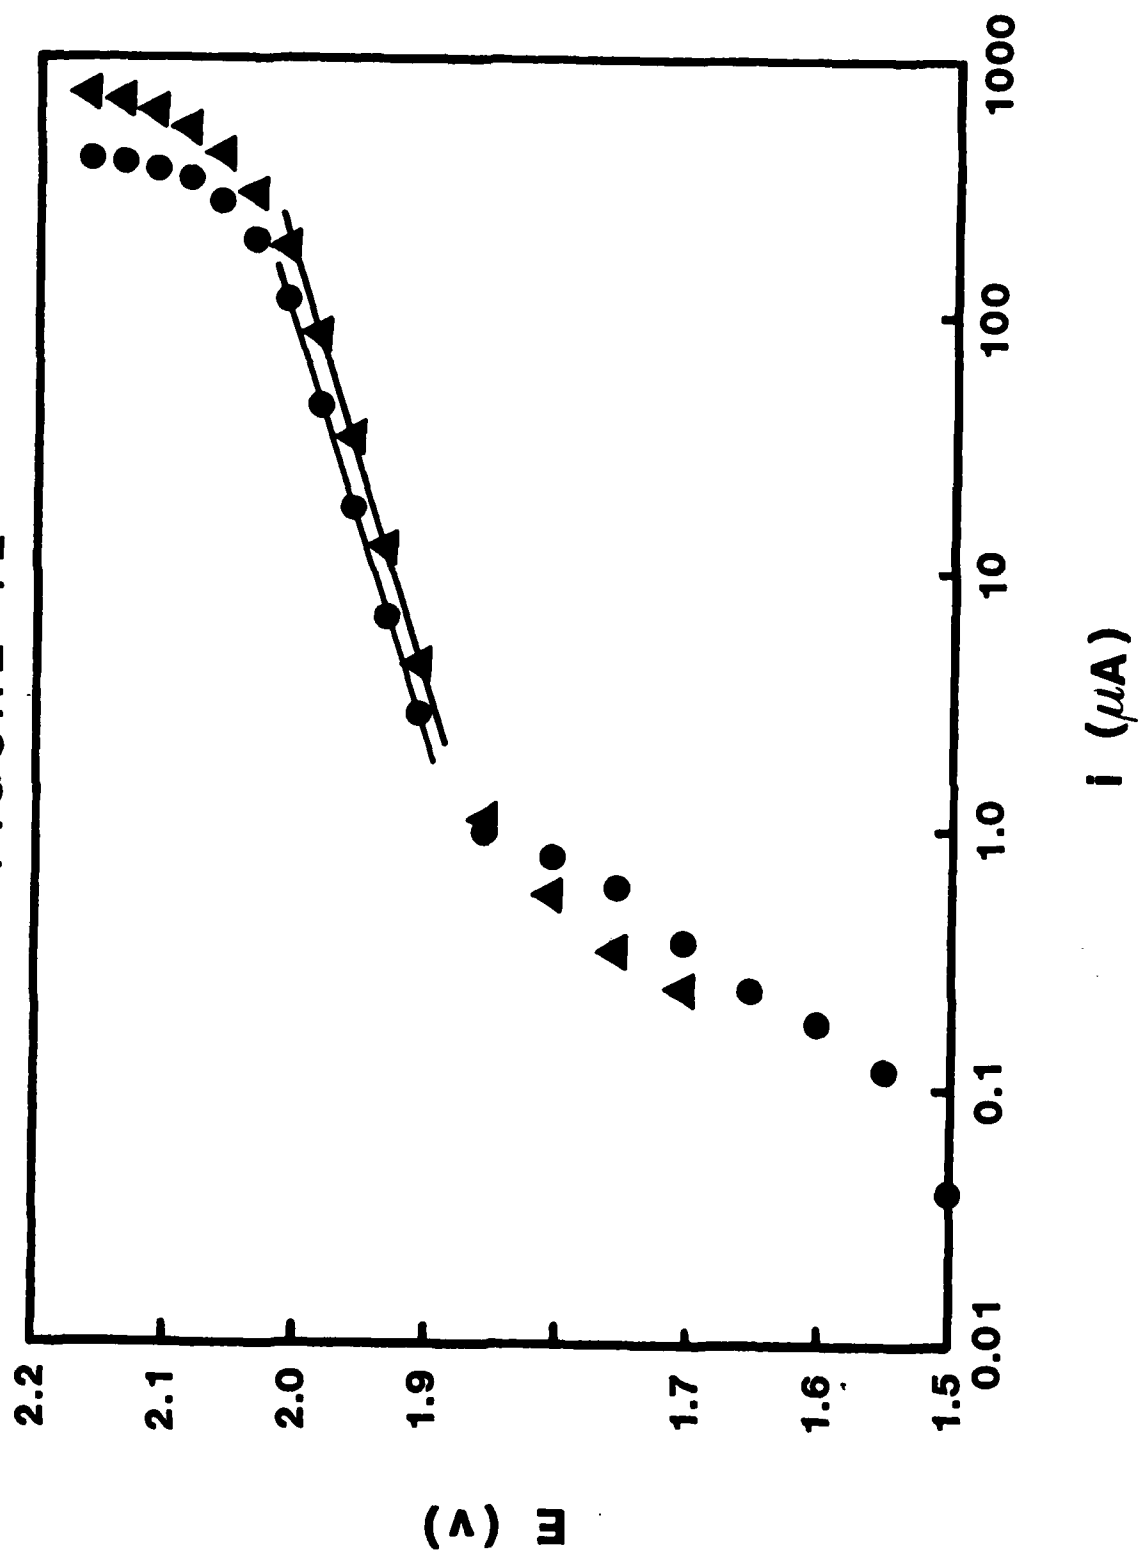


FIGURE 13

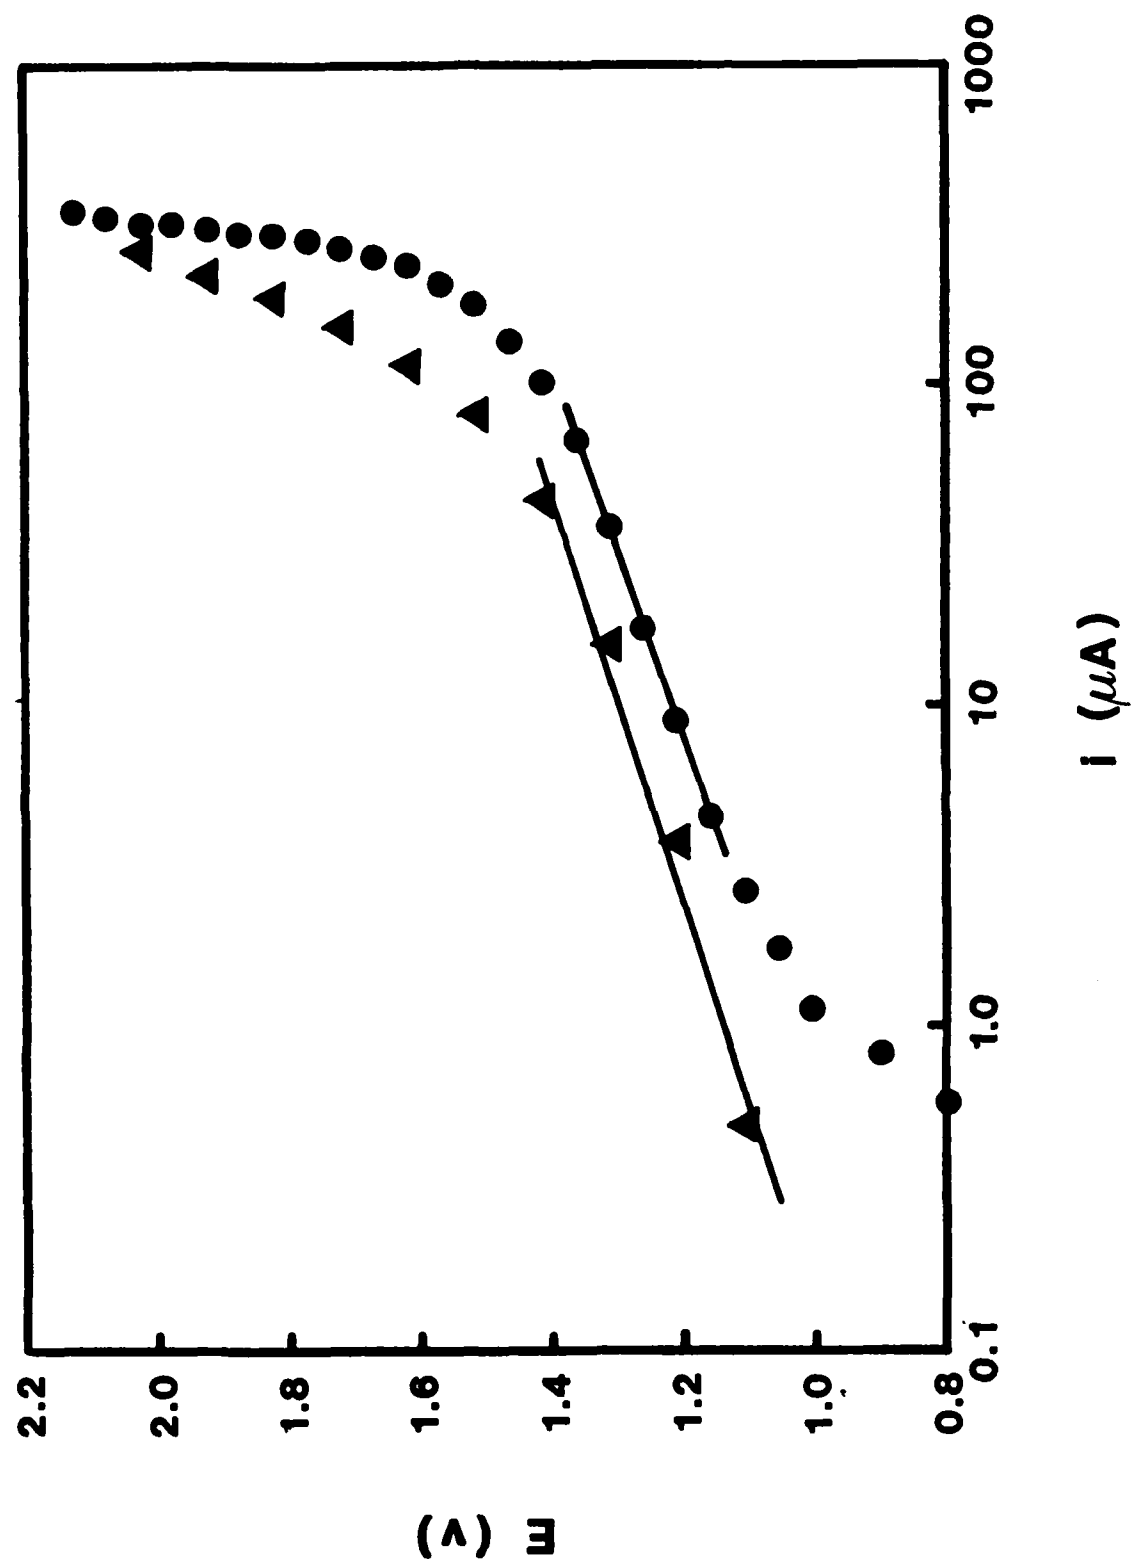

END

1/1-56

DTIC